

Recognizing data types

The most frequently used data types in Java variable declarations are listed in this table along with a brief description:

Beware



Due to the irregularities of floating-point arithmetic the **float** data type should never be used for precise values, such as currency – see page 130 for details.

Data type:	Description:	Example:
char	A single Unicode character	'a'
String	Any number of Unicode characters	"my String"
int	An integer number, from -2.14 billion to +2.14 billion	1000
float	A floating-point number, with a decimal point	3.14159265f
boolean	A logical value of either true or false	true

Notice that **char** data values must always be surrounded by single quotes and **String** data values must always be surrounded by double quotes. Also remember that **float** data values must always have an "f" suffix to ensure they are treated as a **float** value.

In addition to the more common data types above, Java provides these specialized data types for use in exacting circumstances:

Don't forget



All data type keywords begin with a lowercase letter except **String** – which is a special class.

Data type:	Description:
byte	Integer number from -128 to +127
short	Integer number from -32,768 to +32,767
long	Positive or negative integer exceeding 2.14 billion
double	Extremely long floating-point number

Specialized data types are useful in advanced Java programs – the examples in this book mostly use the common data types described in the top table.

...cont'd


Follow these steps to create a Java program that creates, initializes, and outputs variables of all five common data types:

- 1 Start a new program named "DataTypes" containing the standard main method

```
class DataTypes
{
    public static void main ( String[] args ) {
    }
}
```
- 2 Between the curly brackets of the main method, insert these declarations to create and initialize five variables

```
char letter = 'M' ;
String title = "Java in easy steps" ;
int number = 365 ;
float decimal = 98.6f ;
boolean result = true ;
```
- 3 Add these lines to output an appropriate text **String** concatenated to the value of each variable

```
System.out.println( "Initial is " + letter ) ;
System.out.println( "Book is " + title ) ;
System.out.println( "Days are " + number ) ;
System.out.println( "Temperature is " + decimal ) ;
System.out.println( "Answer is " + result ) ;
```
- 4 Save the program as **DataTypes.java** then compile and run the program

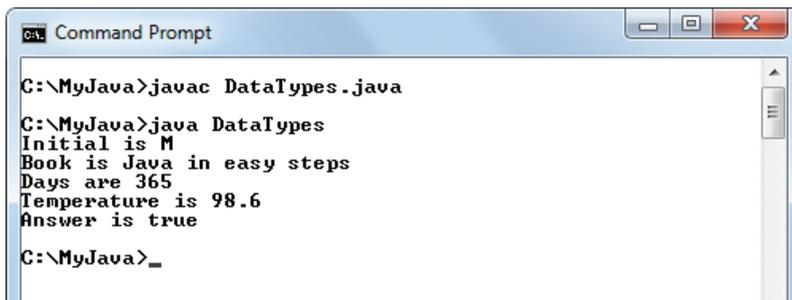

```
Command Prompt
C:\MyJava>javac DataTypes.java
C:\MyJava>java DataTypes
Initial is M
Book is Java in easy steps
Days are 365
Temperature is 98.6
Answer is true
C:\MyJava>_
```



DataTypes.java

Hot tip



Notice how the + character is used here to join (concatenate) text strings and stored variable values.

Hot tip



The Java compiler will report an error if the program attempts to assign a value of the wrong data type to a variable – try changing the values in this example, then attempt to recompile the program to see the effect.